

Installation Guide

LUZ® Panel Luminaire Surface Mount

Important Safety Instructions

Read and follow these warnings and instructions before installing or maintaining this product.

- **WARNING** – Risk of fire or electric shock. To avoid electrical shock or fixture damage turn off power at the electrical panel prior to installation or maintenance.
- Warranty is void in case of unauthorized modifications and/or improper use. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- This product must be installed by a person familiar with the construction and operation of the product and the hazards involved, in accordance with the applicable NEC code.
- Do not install damaged product.
- Save these instructions and refer to them when additions, changes or services to the fixture or system are made.
- Per the NEC, this fixture is non-plenum rated for use in ducts specifically fabricated for environmental air. It is suitable for use above the ceiling in open spaces used for environmental air.



Tools Needed

- Standard electrical tools
- Screwdrivers – Flat and Phillips
- Drill
- ¼" diameter drill bit

Installation Guide

LUZ® Panel Luminaire Surface Mount

1. POWER

- Disconnect your electrical power before installation. Never perform any work on a live circuit.

2. REMOVE EXISTING COMPONENTS

(if applicable)


- Remove existing fixture and dispose of properly.

3. ASSEMBLE

- Assemble all four frame sides using short painted screws.

4. MOUNT

- Position frame over ceiling junction box.
- Check frame for square and mark holes on ceiling.
- Set frame aside.
- Drill holes at each marked location using 1/4" drill bit and insert anchors.
- Attach frame to ceiling using provided long screws.
- Remove one end plate.

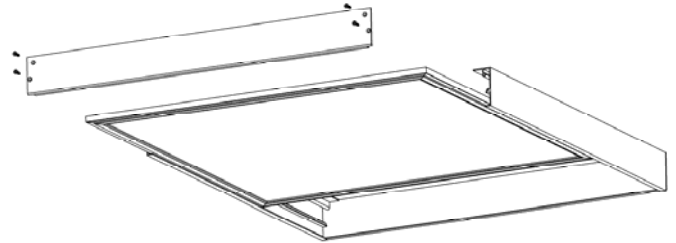

5. CONNECT

- Loosen access plate screw and remove access cover.
- Remove appropriate conduit knockouts. Connect conduit using appropriate connectors.
- Connect building wires from power source to fixture.
- Connect building wire to fixture leaving enough slack to slide fixture the length of the enclosure.
- Replace access cover and tighten access screw.

6. COMPLETE INSTALLATION

- Slide fixture into lower track of frame.
- Re-attach end plate with short painted screws.